arXiv:1304.1423v1 [cs.DM] 4 Apr 2013

Balancing parallel assembly lines with disabled workers

Felipe F. B. Araújo[a], Alysson M. Costa[a*] and Cristóbal Miralles[b]

[a] *Instituto de Ciências Matemáticas e de Computação, USP, Brazil*
[b] *ROGLE - Dpto. Organización de Empresas , UPV, Spain*

April 5, 2013

[**] Corresponding author. Email: alysson@icmc.usp.br

Abstract

We study an assembly line balancing problem that occurs in sheltered worker centers for the disabled, where workers with very different characteristics are present. We are interested in the situation in which parallel assembly lines are allowed and name the resulting problem as parallel assembly line worker assignment and balancing problem. We present a linear mixed-integer formulation and a four-stage heuristic algorithm. Computational results with a large set of instances recently proposed in the literature show the advantages of allowing alternative line layouts.

Keywords: parallel assembly line balancing; heterogeneous workers; heuristics.

1 Introduction

The current economic downturn raises substantial challenges to the goals and actions proposed for the Disabled integration. According to the International Labour Organization (ILO), people with disabilities represent an estimated 10 per cent of the world's population, where almost 500 million are of working age. Labour market activation for their inclusion is easier to address in periods of increasing labour demand than in times of recession. Nevertheless, there is evidence of national actions to create more flexible work solutions, and the success of such initiatives show that there is scope to learn from best-practice cases, including a comprehensible knowledge about how and why they work (Greve; 2009).

In this sense, one of the actions most commonly adopted to facilitate the integration of people with disabilities into the labor market has been the creation of Sheltered Work centers for Disabled (henceforth SWDs). This model of socio-labor integration tries to move away from the traditional stereotype that considers these people unable to develop continuous professional work (Miralles et al.; 2010). Just as any other firm, a SWD competes in real markets and must be flexible and efficient enough to adapt to market fluctuations; the only differences being that the SWD receive some governmental help to compensate the fact that most of its workers (usually around 70%) are disabled, and some limitations and therapy requirements must be taken into account.

In countries such as Spain, this labor integration formula keeps being successful in offering jobs to disabled people. One of the strategies of SWDs to facilitate this integration is to use assembly lines as the most accessible configuration. In this sense Miralles et al. (2007) were the first to evidence how the division of work in single tasks enables many possible job assignments that make invisible the disabilities.

1.1 Literature review

Traditional assembly line balancing research has focused on the simple assembly line balancing problem (SALBP), that uses several well-known simplifying hypotheses, which reduce the complex problem of assembly line configuration to the "core" problem of assigning tasks to stations so that certain precedence constraints are fulfilled.

In recent years a growing amount of literature has been produced dealing with more realistic and generalized problems. Regardless of the theoretical importance of the SALBP, balancing real-world assembly lines requires the observation of a large variety of additional technical and organizational aspects, which can heavily affect the structure of the problem. In fact, in the last decade a big effort has been made towards modeling real world assembly line systems through different extensions of SALBP, aiming to narrow the former gap between research and practice (see reviews of Scholl and Becker (2006) , Becker and Scholl (2006), Boysen et al. (2007, 2008) or more recently Dolgui and Battaïa (2013)).

In this sense the so-called *assembly line worker assignment and balancing problem* (ALWABP) represents one of these recent efforts made by the Academia. The ALWABP focus on the heterogeneity of task times and the presence of incompatibilities, defining a new set of realistic hypotheses inspired by the SWD assembly lines where disabled workers usually execute tasks at different rates (Miralles et al.; 2007). The ALWABP defines worker-dependent processing times, which allow taking into account the limitations of each worker and can, therefore, be useful in environments other than SWDs where workers also have diverse speeds to perform certain tasks (Araújo et al.; 2012).

Since the initial paper of Miralles et al. (2007), many other references have contributed to give this problem visibility in the scientific literature and several solution methods have been proposed. Exact methods have focused on branch-and-bound strategies (Miralles et al.; 2008; Borba and Ritt; 2012) although most of the efforts have concentrated on heuristic and metaheuristic methods due to the NP-hard condition of the problem, using strategies such as clustering search (Chaves et al.; 2009), tabu search (Moreira and Costa; 2009), Iterated Beam Search (Blum and Miralles; 2011), constructive heuristics (Moreira et al.; 2012) or genetic algorithms (Moreira et al.; 2012; Mutlu et al.; 2013).

1.2 Contribution and outline of this work

Despite this intense research on the ALWABP, the literature still presents a significant gap in terms of proposing flexible configurations in the context of SWDs (or in contexts with heterogeneous workers in general). In the particular case of SWDs that motivates this paper, managers require easy tools to handle the workers heterogeneity while optimizing productive efficiency. Therefore, it is very important for them to count on as many alternative combinations as possible for job assignments with the workers available.

In spite of these flexibility requirements, the ALWABP is traditionally limited by the hypothesis of a single serial assembly line that maximizes the production rate with the resources (workers) available. We propose to open this scope and analyze alternative configurations that might adequate better to the available workforce. In particular, we study the possibility of assigning workers to teams, which can then operate parallel assembly lines. Our hypothesis is that by exploring these new configurations, a large number of new worker-tasks assignments will appear and possibly allow the obtention of higher productivity levels.

To the best of our knowledge, Araújo et al. (2012) were the sole authors to analyze such possibility. The authors study the assignment of workers in parallel, at the same station of a single line. Although some positive results have been obtained, this approach has the drawback of possibly increasing the complexity of coordination and control. In this paper, we propose to create new (parallel) assembly lines which will make use of all available workers. This is done by building work teams which can operate independently from each other.

In this sense, this paper will completely define an extension of ALWABP that can provide better solutions than the traditional approach, just by allowing parallel complete lines. We name this extension as the *parallel assembly line worker assignment and balancing problem* (PALWABP). In the following, this problem is analyzed by means of an example. Then, a formal definition and a mathematical model are proposed. In Section 4, a heuristic methodology for obtaining good-quality results in low computation times is detailed. Computational results over a large set of instances are presented and analyzed in Section 5. Finally, general conclusions and hints for future works end this paper in Section 6.

2 Parallel Assembly line Worker Assignment and Balancing Problem

As introduced in section 1, the ALWABP is a generalization of the SALBP where, in addition to the assignment of tasks to stations, a set of heterogeneous workers that execute the tasks also has to be assigned to stations (Miralles et al.; 2008).

Most previous proposals in the literature face the ALWABP of type 2 (minimization of cycle time given a fixed number of workers), the most typical situation in reality, and have been mostly evaluated with the set of 320 benchmark instances first proposed by Chaves et al. (2009). In order to illustrate the extension here proposed, we have extracted the problem HESKIA_64 of this benchmark and expressed its input data and the optimal solution in Table 1 and Figure 1, respectively. In the table, for every task (rows) several operation times are possible depending on the worker (columns). If a task is considered unfeasible for certain worker, the incompatibility is represented by a dash in the corresponding cell of the input data matrix. In the optimal solution of Figure 1 we can notice how all the precedence constraints are respected while ensuring an optimal cycle time of 126 s (given by the bottleneck station, which is the second station with worker W6 performing task 20):

This is the minimum cycle time we can get with the traditional ALWABP approach. But if we allow the possibility of designing complete parallel lines with the available workers, then solution space is enlarged, and lower global cycle times can be reached. To illustrate this fact, let's focus now on table 1 (but now taking into account the light shaded/dark shaded cells, and the bottom of the table):

In the table we have represented an alternative solution by using a light shade on cells with task-assignments within line 1, and a darker shade on those cells with task-assignments within line 2; and where it can be easily checked how precedence constraints have been respected in both parallel lines. At the bottom of the table we summarized the workstations of each sub-line with the following independent work teams:

- Line 1 is composed of four consecutive stations with workers W5, W4, W1 and W7. Workers W1 and W4 are bottlenecks with a cycle time of 135.
- Line 2 is composed of three consecutive stations with workers W3, W2, and W6. Workers W2 and W6 are bottlenecks with a cycle time of 354.

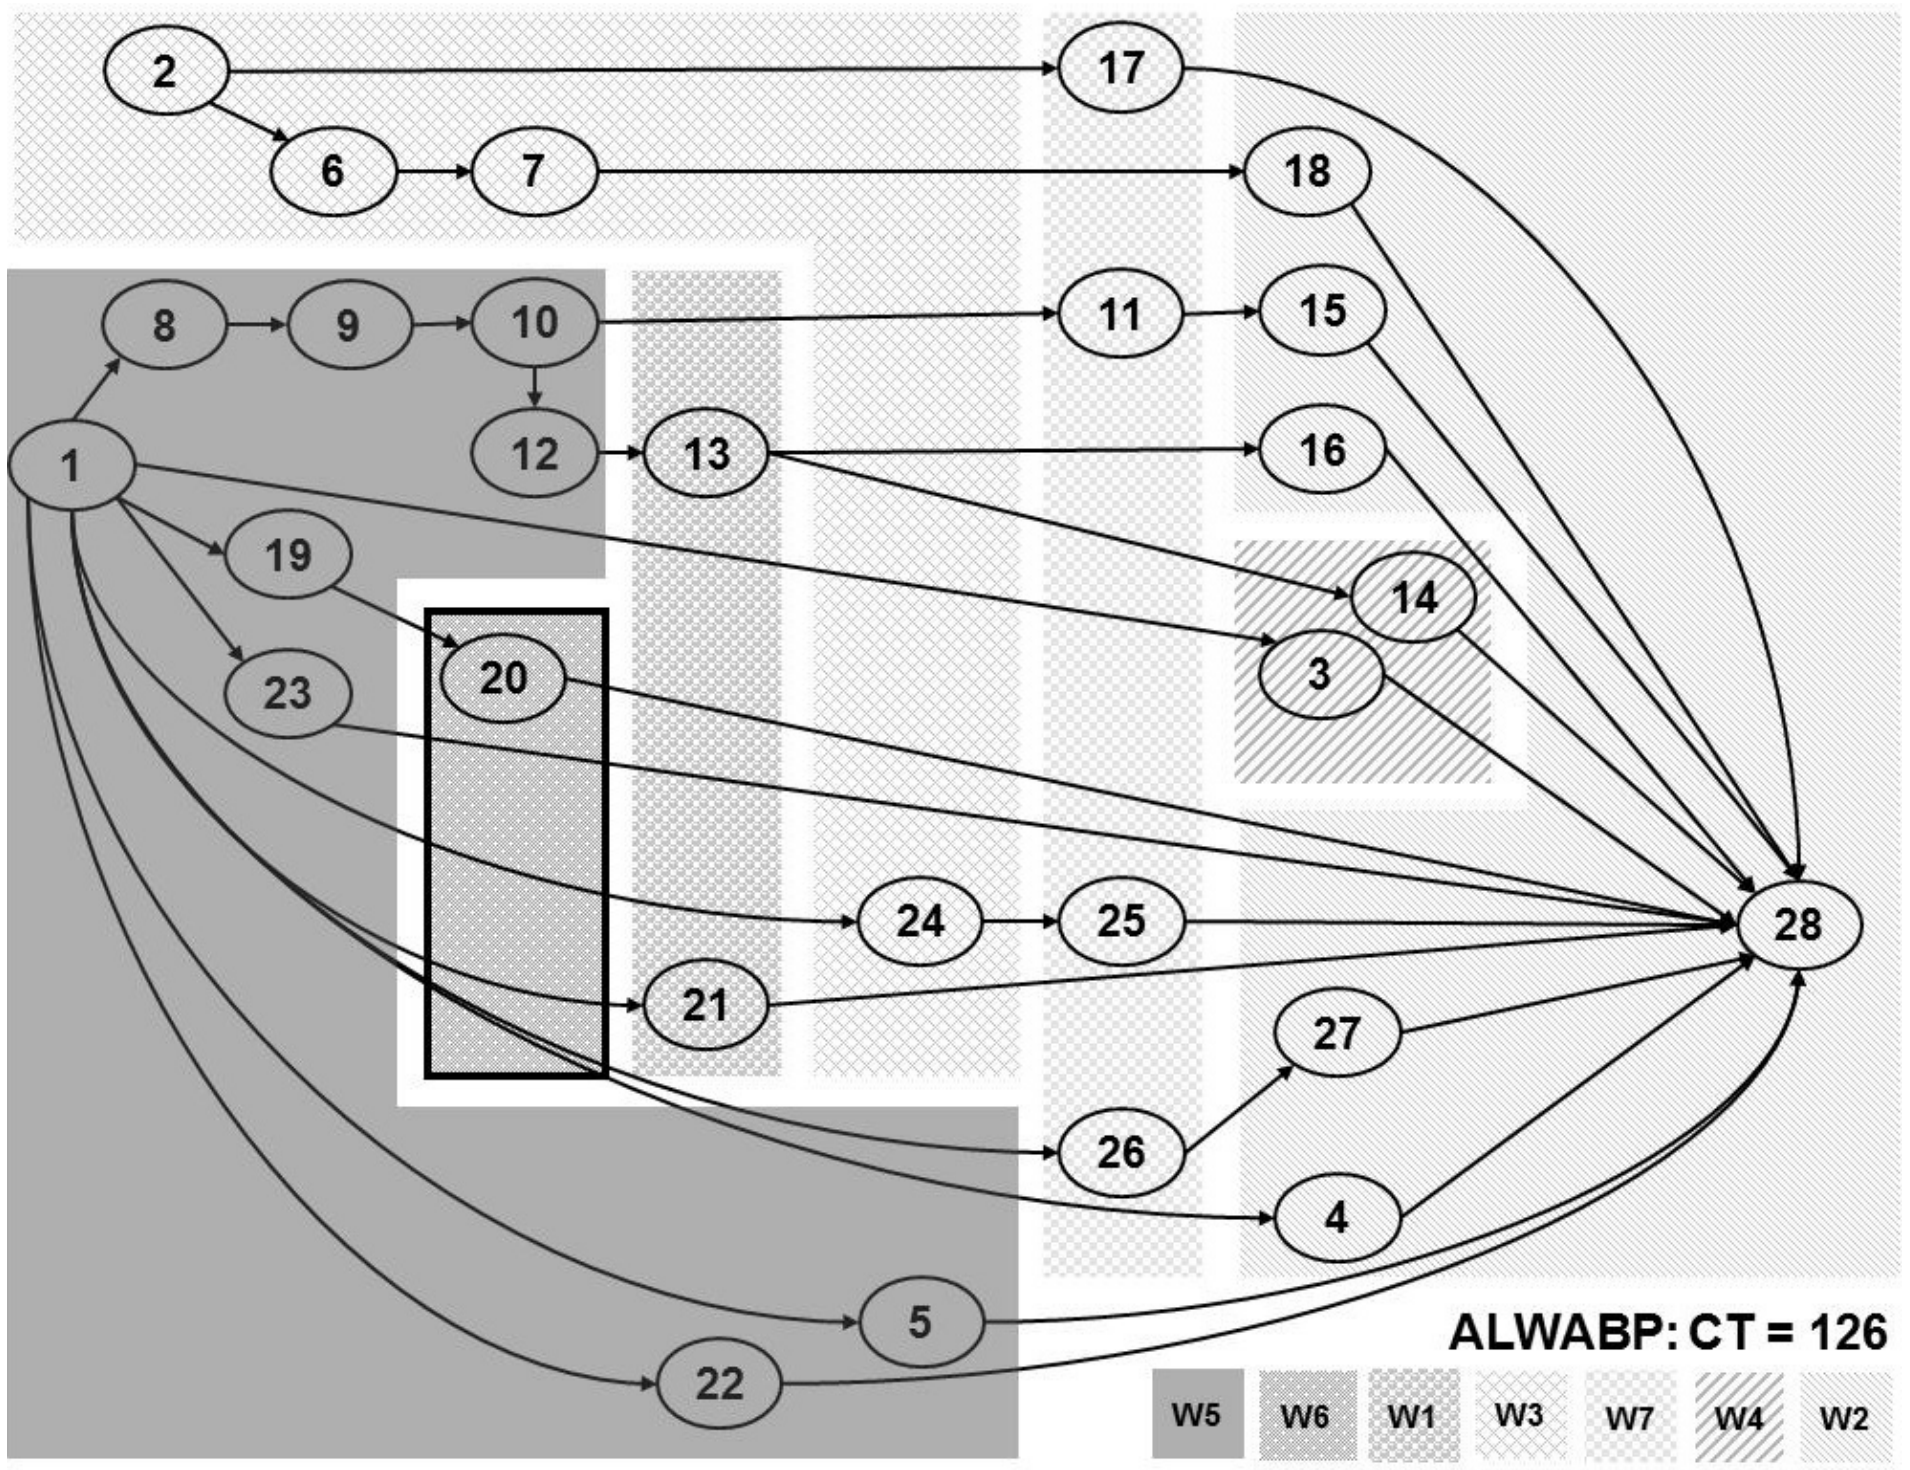

Figure 1: Optimal solution for HESKIA_64 with the traditional ALWABP approach

To compute the global cycle time (CT) of this configuration we can define the corresponding Throughput Rates (TR) of both lines. In this case, we have:

- Line 1 has CT_1 = 135 s/part, which is equivalent to a throughput TR_1 = 26.67 parts/h
- Line 2 has CT_2 = 354 s/part, which is equivalent to a throughput TR_2 = 10.17 parts/h

Thus, the global Throughput Rate using this parallelized configuration is: $TR = TR_1 + TR_2$ = 36.84 parts/h, that corresponds to a combined cycle time CT = 97.7 s/part

Therefore, the optimal cycle time of 126 obtained for HESKIA_64 with the traditional serial ALWABP approach is improved by more than 22% just by assigning workers to parallel complete lines. As will be later demon-

Tasks:	**W1**	**W2**	**W3**	**W4**	**W5**	**W6**	**W7**
1	70	88	20	57	5	42	118
2	59	14	17	-	17	2	20
3	33	45	26	13	28	17	-
4	6	1	9	2	9	*1*	3
5	1	2	1	2	1	1	1
6	27	25	14	38	48	45	49
7	17	20	9	9	27	17	32
8	62	43	97	9	10	100	26
9	31	56	60	-	11	9	-
10	53	91	36	37	12	101	93
11	21	-	13	17	7	35	5
12	19	31	9	1	15	1	36
13	108	136	-	194	133	179	171
14	52	76	32	68	-	-	33
15	5	10	6	6	9	8	4
16	8	4	-	7	2	8	2
17	97	-	165	99	5	150	103
18	8	8	12	1	-	12	4
19	47	50	22	2	49	-	25
20	67	126	129	132	-	126	133
21	17	5	26	12	10	15	4
22	8	16	-	6	15	-	12
23	3	-	3	3	4	-	-
24	21	29	37	18	32	12	32
25	107	163	-	177	179	94	14
26	3	3	2	3	-	-	3
27	2	2	4	-	2	2	2
28	72	83	139	-	128	72	15

	W1			**W4**	**W5**		**W7**
Line-Station:	**Line1-s3**			**Line1-s2**	**Line1-s1**		**Line1-s4**
Cycle time:	135			135	124		104

		W2	**W3**			**W6**	
Line-Station:		**Line2-s2**	**Line2-s1**			**Line2-s3**	
Cycle time:		354	347			354	

Table 1: Matrix of process times for HESKIA_64 and solution with two parallel lines

strated, this is not an isolated successful example, since many others benchmark cases get better cycle times through this strategy.

In addition to this improvement in global efficiency, the proposed parallel assembly lines layout has also some practical advantages, that can be summarized as follows:

- In the case of workers with very slow operation times, it is much easier to integrate them if we allow parallel lines.

- With the parallelization, the facilities and tools must be replicated, with the possible inconvenient of certain physical constraints or installation costs but with a clear advantage: the manager gets many more possible task assignments, that can be crucial for job rotation purposes (see Costa and Miralles (2009) and Moreira and Costa (2012)).
- In fact, having more lines supposes that workers execute a higher number of tasks, in average, avoiding work routine and improving workers capabilities.
- As it happens with SALBP, when we allow parallelization the cycle time can be lower than the largest operation time. In the case of ALWABP, lower than the slowest task to execute (obtained with a max-min operation over all worker × tasks execution times).
- Furthermore, parallelizing complete lines, instead of single stations and/or tasks, makes the assembly line management and self-control easier: every operator is assigned to a work team in charge of certain station within a complete parallel serial line, with independent feeders, work in progress stocks, and tools.

2.1 Review on parallelization within assembly lines

Despite the fact that most assembly lines addressed in the literature are quite different from ALWABP, it is important to review the most important references that somehow face parallelization. Thus, we can start chronologically by citing the work of Askin and Zhou (1997), who consider mixed-model assembly lines with task dependent equipment costs and arbitrary number of parallel workstations. They propose a heuristic procedure that uses a threshold value for the equipment utilization. Süer (1998) proposes a simple resolution method in three phases, while McMullen and Frazier (1997, 1998) propose a heuristic and a simulated annealing technique for a problem with parallel stations and stochastic times. In both cases, they measure the line performance by the total cost and the extent to which cycle time is met. Vilarinho and Simaria (2002) introduce a two-stage heuristic method for mixed-model assembly lines, where their primary goal is to minimize the number of workstations for a given cycle time, and the secondary goal is to balance the workload between workstations. Bukchin and Rubinovitz (2003) study the equipment selection problem on parallel workstations, investigating the influence of assembly sequence flexibility and cycle time on the balancing improvement due to the station paralleling. Simaria and Vilarinho (2004) propose a model and a genetic algorithm for a mixed model assembly line with parallel stations. Two years later the same authors propose in (Vilarinho and Simaria; 2006) an ant colony optimization algorithm for balancing the mixed-model assembly lines with zoning restrictions and parallel workstations. Boysen and Fliedner (2008) present a versatile graphic algorithm that can be adapted for parallel stations, and Ege et al. (2009) consider parallel workstations and propose a branch and bound algorithm to minimize total equipment and workstation opening costs.

It is important to highlight (Scholl and Boysen; 2009), that consider a problem first introduced by Gökçen et al. (2006) and named as *parallel assembly line balancing problem* (PALBP) where different products and/or models can be assigned to different serial lines arranged in parallel while considering a joint cycle time. From 2009, the PALBP has been the main topic of research in parallelization where, even not being the focus of this paper (since in our case we have the same product to be performed in parallel assembly lines), we can highlight two recent references: Kara et al. (2010) proposed a fuzzy goal programming model that can be used for balancing this kind of multi-product parallel lines. Ozbakir et al. (2011) propose a multiple-colony ant algorithm for balancing multi-product with two objectives (maximizing the line efficiency and minimizing the idle time of workstations) parallel assembly lines; obtaining good results with respect to other existing algorithms.

Finally, Kellegöz and Toklu (2012) propose efficient branch and bound algorithms to solve assembly lines with parallel multi-manned workstations, a configuration that is necessary for big-sized complex products containing a large number of assembly tasks, most of which have long task times.

The only reference that studies the ALWABP with parallelization is (Araújo et al.; 2012), where two extensions are explored: in the first extension they allow multiple stations to execute the same set of tasks in the same stage; and in the second extension different workers can complement their capabilities collaborating in the same product within certain workstation. In fact, the first extension uses parallelism to get more combinations of worker-tasks assignments. However, the difference with respect to our proposal is that we force to configure complete parallel assembly lines, building up independent work teams that don't increase complexity of control as it may happen in (Araújo et al.; 2012); where parallelizing only certain stations and/or tasks can be cluttering because the production flow is divided/duplicated (what can be hard to coordinate, especially in the case of mental disabilities).

These practical insights made us reflect on the need of proposing models and algorithms for complete parallel stations in ALWABP. In the following section, we present a formal definition of this problem by means of a classical literature taxonomy and also via a mathematical model.

3 Formal definition and mathematical model

We formally classify the PALWABP using the nomenclature of Boysen et al. (2007), that structures the vast field of assembly line balancing problems by means of a notation consisting of three elements $[\alpha|\beta|\gamma]$, where:

- α concerns the precedence graph characteristics;
- β concerns the station and line characteristics;
- and γ concerns the optimization objectives.

Various possible values are defined for each of these three elements, covering all existing assembly line balancing problems in the literature, and where the absence of values indicates the assumption of SALBP hypothesis (e.g. SALBP-2 is coded as [||c]).

Boysen et al. (2007) classified the ALWABP-2 as [pa,link,cum|equip|c]. In the PALWABP, we allow multiple assembly lines (β=pline). Therefore, the PALWABP-2 can be classified as [pa,link,cum|pline,equip|c]; whereas the previous proposal of Araújo et al. (2012) has formal and practical differences that have been properly detailed, being coded as [pa,link,cum| pstat,equip|c].

3.1 Mathematical model for PALWABP

Let $(N, \leq)$ be a partially ordered set of tasks in which $i < (>) j$ indicates that a task i must precede (succeed) a task j. Also let W be a set of workers and p_{wi} an integer associated with each pair $(w, i) \in (W, N)$ indicating the time worker w spends to execute task i. Also, I_w is the set of tasks that worker w is not able to perform. Consider an assignment $a_t : N \rightarrow S$ of the tasks to a linear sequence of stations $S = \{1, 2, \ldots, m\}$ respecting the tasks partial order and an assignment $a_w : W \rightarrow S$ of the workers to the same linear sequence of stations $S = \{1, 2, \ldots, m\}$. The load of a station is the time the worker assigned to that station needs to execute those tasks assigned to the station. Finally, the *cycle time* of such assignments is the largest load among all stations. The ALWABP-2 aims at finding assignments a_t and a_w minimizing the line cycle time. Let ALWABP-2(N, W, p_{wi}) be such optimal cycle time.

The PALWABP-2 considers the same input data and an extra integer, K_{max}, which limits the maximum number of parallel assembly lines. It then aims at finding a partition of W in $W_1, W_2 ... W_{K_{max}}$ sets, such that the overall throughput rate $\sum_{k=1}^{K_{max}} \frac{1}{\text{ALWABP-2}(N, W_k, p_{wi})}$ is maximal. We assume that a set W_k can be empty and, in this case, ALWABP-2$(N, W_k, p_{wi}) = \infty$.

In the following, we present a mathematical model for the PALWABP-2. We define the following set of variables:

x_{swik}	Binary variable. Equals one if worker w executes task i in station s of line k and zero otherwise
y_{swk}	Binary variable. Equals one if worker w is designated to station s in line k and zero otherwise
z_k	Binary variable. Equals one if line k is active (that is, if at least one worker is assigned to that line) and zero otherwise
C_k	The cycle time of line k

We can write the following model for the ALWABP with parallel lines:

$$Min \quad \frac{1}{\sum_{p=1}^{K_{Max}} \frac{1}{C_k}} \tag{1}$$

Subject to:

$$\sum_{w\in W}\sum_{s\in S} x_{swik} = z_k, \qquad \forall i \in N, \forall k \in K, \tag{2}$$

$$\sum_{s\in S}\sum_{k=1}^{K_{Max}} y_{swk} = 1, \qquad \forall w \in W, \tag{3}$$

$$\sum_{w\in W} y_{swk} \leq z_k, \qquad \forall s \in S, \forall k \in K, \tag{4}$$

$$\sum_{w\in W}\sum_{s\in S|s\geq t} x_{swip} \leq \sum_{w\in W}\sum_{s\in S|s\geq t} x_{swjk}, \qquad \forall i,j \in N|i<j, \; \forall t \in S, \forall k \in K, \tag{5}$$

$$\sum_{i\in N} x_{swik} \leq |N| y_{swk}, \qquad \forall w \in W, \forall s \in S, \forall k \in K, \tag{6}$$

$$\sum_{i\in N} p_{wi} x_{swik} \leq C_k, \qquad \forall w \in W, \forall k \in K, \tag{7}$$

$$x_{swik} = 0, \qquad \forall w \in W, \forall s \in S, \; \forall i \in I_w, \forall k \in K, \tag{8}$$

$$x_{swik} \in \{0,1\}, \qquad \forall s \in S, \forall w \in W, \; \forall i \in N, \forall k \in K, \tag{9}$$

$$y_{swk} \in \{0,1\}, \qquad \forall s \in S, \forall w \in W, \forall k \in K, \tag{10}$$

$$z_k \in \{0,1\}, \qquad \forall k \in K. \tag{11}$$

The objective function (1) minimizes the combined cycle time. Constraints (2) guarantee that in every active line, each task is executed by a single worker in a single station. Constraints (3) guarantee that every worker will be assigned to only one station from one of the parallel lines. Constraints (4) allow a single worker in each station of active lines and zero in each station of non-active lines. Constraints (5) establish the precedence relations between the tasks in each assembly line. Constraints (6) state that a worker can execute tasks in one stage only if that worker is assigned to that stage. Constraints (7) define the cycle time for each assembly line as the execution time among all workers from that line while constraints (8) handle the task-worker infeasibilities.

The objective function (1) makes this model non-linear. In order to linearize it, we adapted the linearization proposed by Araújo et al. (2012) for the ALWABP with parallel workstations. In that work, the authors changed the objective function to maximize the throughput rate of the assembly line, which is equivalent to minimizing the cycle time. This can be adapted for the PALWABP by changing the objective function to maximize the sum of the throughput rates of each assembly line. Using the new variables:

F_k	The production rate of line k.
f_{swk}	The production rate of worker w in stage s of line k. Equals zero if the worker is not assigned to that stage of that line.
v_{swik}	Auxiliary variable used for linearization. Corresponds to $f_{swk} * x_{xwik}$

We can write a linear model for the PALWABP as:

$$Max \quad \sum_{p=1}^{K_{Max}} F_k \tag{12}$$

Subject to:

$$(2) - (11) \tag{13}$$

$$\sum_{w \in W} f_{swk} \geq F_k - M(1 - \sum_{w \in W} y_{swk}), \qquad \forall s \in S, \forall k \in K, \tag{14}$$

$$\sum_{i \in N} p_{wi} v_{swik} = y_{swk}, \qquad \forall w \in W, \forall s \in S, \forall k \in K, \tag{15}$$

$$f_{swk} \leq M y_{swk}, \qquad \forall w \in W, \forall s \in S, \forall k \in K, \tag{16}$$

$$v_{swik} \geq f_{swk} - M(1 - x_{swik}), \qquad \forall s \in S, \forall w \in W, \forall i \in N, \forall k \in K, \tag{17}$$

$$v_{swik} \leq M x_{swik}, \qquad \forall s \in S, \forall w \in W, \forall i \in N, \forall k \in K, \tag{18}$$

$$F_k \geq 0, \qquad \forall k \in K, \tag{19}$$

$$f_{swk} \geq 0, \qquad \forall s \in S, \forall w \in W, \forall k \in K, \tag{20}$$

$$v_{swik} \geq 0, \qquad \forall s \in S, \forall w \in W, \forall i \in N, \forall k \in K. \tag{21}$$

The new objective function (12) maximizes the overall production rate. Constraints (14) define the production rate of active line as the production rate of the slowest stage. Constraints (15) define v_{swik} as a ponderation of the task times. Constraints (16) state that $f_{swk} = 0$ if worker w is not assigned to stage s of line k. Constraints (17) and (18) set the bounds of v_{swik}. Constraints (16) and (17) make $v_{swik} = f_{swk}$ if $x_{swik} = 1$, while constraints (18) make $v_{swik} = 0$ if $x_{swik} = 0$.

This model is used to solve small instances (see Section 5). Nevertheless, due to its complexity, a heuristic solution method is developed in the following section.

4 A four-stage heuristic solution method

In this section we present a 4-stage heuristic to solve the PALWABP-2. The core idea of the method is the generation of sets of workers that can be assigned together in an independent line. Each of such team of workers must be able to execute all tasks while respecting the precedence constraints.

The heuristic procedure is divided into four main steps, as shown in Figure 2. First the sets of tasks each worker can execute are obtained. Secondly, with these sets, feasible worker sets (i.e., workers that can be assigned together to a complete line) are generated. In the third step, each set is evaluated according to the production rate of the obtained assembly line. Finally, a maximum of K_{max} sets are selected to compose the final solution. In the following, these four steps are detailed.

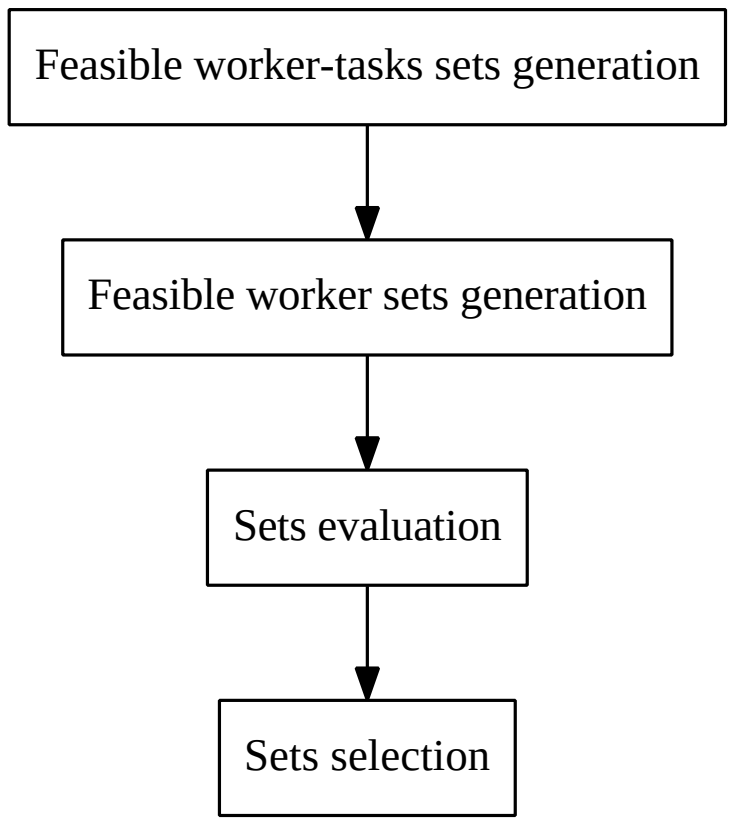
Feasible worker-tasks sets generation
Feasible worker sets generation
Sets evaluation
Sets selection

Figure 2: Flowchart for the heuristic for the PALWABP

4.1 Feasible worker-tasks sets generation

In this first phase, the sets of all tasks that can be executed in a single station by each worker are obtained. If cycle time constraints are ignored, a worker w can execute any set of tasks as long as he is not obliged to execute a task in I_w. Using binary variables x_i equals one if a task i belong to a set, the following constraints express this condition:

$$x_i = 0, \qquad \forall i \in I_w, \tag{22}$$

$$x_i + x_j \leq 1, \qquad \forall i, j \in N \backslash I_w, k \in I_w | i < k, j > k. \tag{23}$$

Constraints (22) explicitly forbid the selection of tasks belonging to I_w while constraints (23) indicate that a set cannot contain two tasks if this will require the execution of a task in I_w.

In order to avoid sets of tasks that are contained in other sets, we can solve the following linear problem:

$$\text{Max} \sum_i x_i \tag{24}$$

subject to (22) and (23).

This will generate the set with maximum number of tasks. To generate sets with tasks not included in this solution, it suffices to re-solve the model with the constraint $x_i = 1$, at most once, for all task $i \in N \backslash I_w$.

Alternatively, we propose a simple constructive procedure. Let $i \in N$ be a task and $I \subset N$ be a set of tasks. We use the notation $i \not\succ (\not\prec) I$ to indicate that task i does not succeed (precede) any of the tasks of I. The method presented in Algorithm 1 is able to quickly determine T_w, the sets of tasks that can be executed by a worker w.

Algorithm 1 Task sets generation

```
Require: $N, w \in W$
1: $T_w = \emptyset$
2: for all $I \subset I_w$ do
3:     $s = \{i \in N \backslash I_w | i \not\prec I, i \not\succ I_w \backslash I\}$
4:     if $s \not\subset j \in T_w$ then
5:         $T_w = T_w \cup s$
6:     end if
7: end for
8: Return $T_w$
```

The algorithm receives as input the worker being analyzed and the ordered set of tasks. It then considers all subsets of tasks that worker w can not execute (line 2). In its next step, it assumes that these tasks have been executed in stations previous to the station to which w has been assigned and adds to the set of tasks that w can execute all tasks that do not succeed any other task that w can not execute (line 3). All the sets of feasible sets of tasks are collected in set T_w (line 5) which is then returned (line 8).

Example: Consider the precedence graph shown in Figure 3. Worker w_1 can not execute task 2 while worker w_2 can not execute task 3.

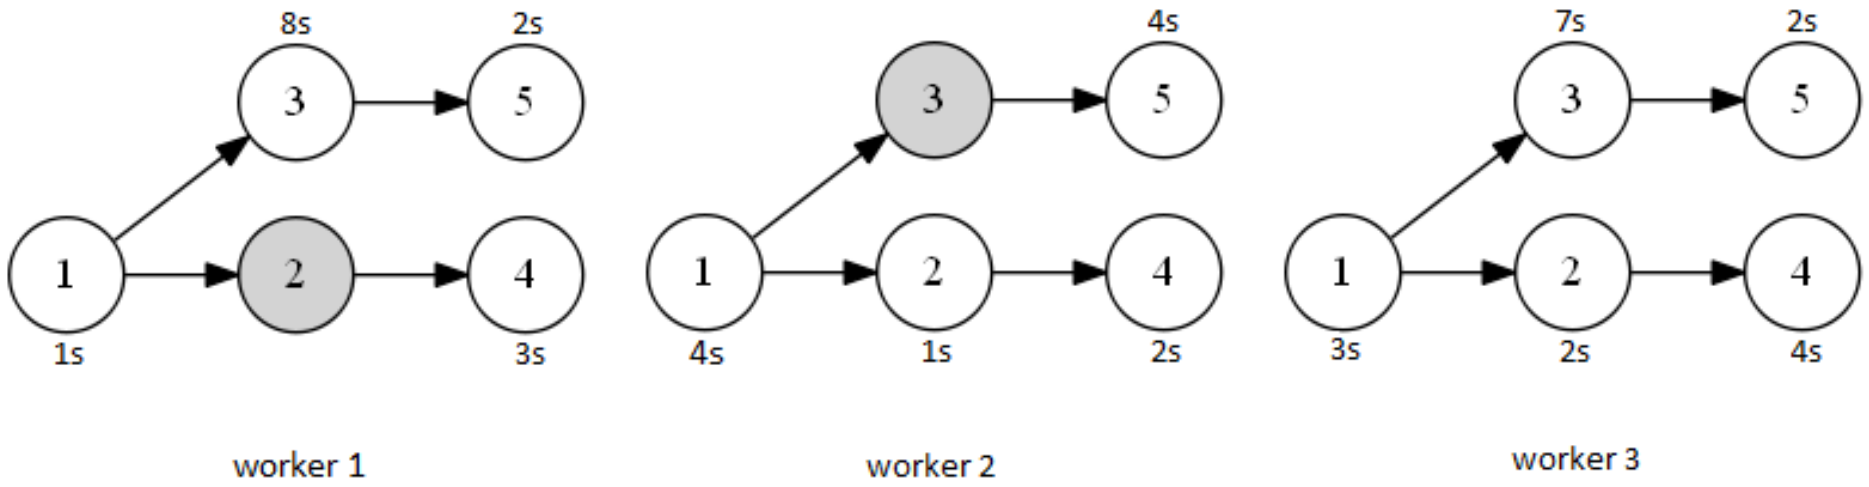

Figure 3: Example of precedence graph

The subsets of I_{w_1} and I_{w_2} (see line 2 of Algorithm 1) are $\{\emptyset, \{2\}\}$ and $\{\emptyset, \{3\}\}$, respectively. They yield $T_{w_1} = \{\{1,3,5\},\{3,4,5\}\}$ and $T_{w_2} = \{\{1,2,4\},\{2,4,5\}\}$. Worker w_3 can execute all tasks and, therefore, $T_{w_3} = \{\{1,2,3,4,5\}\}$

4.2 Feasible worker sets generation

The goal of this phase is to select one set of tasks from each worker so that each task is covered by at least one set. By doing this, we want to ensure the existence of a viable solution for the ALWABP with these workers. The information obtained in the previous stage is now used to determine all combinations of workers that can be assigned together to a team. For each worker, let T_w be the sets of tasks obtained and a_{iwt} be a parameter equals to one if task i belongs to set $t \in T_w$. Using variables y_{wt} (equals one if worker w is selected and executes subset t^{th} of his set of tasks), a feasible worker set must respect the following constraints.

$$\sum_{t=1}^{|T_w|} y_{wt} \leq 1, \qquad \forall w \in W, \tag{25}$$

$$\sum_{w \in W} \sum_{t=1}^{|T_w|} a_{iwt} y_{wt} \geq 1, \qquad \forall i \in N. \tag{26}$$

Constraints (25) indicate that a worker w, if selected, can only execute tasks that are a subset of $t \in T_w$. Constraints (26), in turn, guarantee that all tasks can be executed by at least one worker in the line.

In this situation, we are interested in obtaining the sets of workers that respect constraints (25) and (26) with minimum cardinality, because a line remains feasible if a new worker is added to it. A minimum cardinality set can be obtained by solving the problem:

$$\text{Min} \sum_{w \in W} \sum_{t=1}^{|T_w|} y_{wt} \tag{27}$$

subject to (25) and (26).

A set of workers W_s configuring a feasible line can be obtained by simply choosing all workers for which $\sum_t^{T_w} y_{wt} = 1$. As before, other sets can be obtained by repeatedly solving this problem while excluding the already obtained solutions. For example, if a set with workers w_1 and w_2 have been obtained, one can search for a new set solving the problem above with the addition of a constraint $\sum_{t=1}^{|T_{w_1}|} y_{w_1 t} + \sum_{t=1}^{|T_{w_2}|} y_{w_2 t} \leq 1$.

Algorithm 2 Subproblems generation

```
Require: $T_w$
 1: $W_r = \emptyset$, $set\_list = \emptyset$, $worker\_list = \emptyset$
 2: $i = 0$
 3: while $\exists w \in W - worker\_list, s \in T_w | i \in s$ do
 4:     $set\_list = set\_list \cup \{s\}$
 5:     $worker\_list = worker\_list \cup \{w\}$
 6:     if $((N - set\_list) = \emptyset)$ then
 7:         $W_r = W_r \cup \{worker\_list\}$
 8:         Remove last element from $worker\_list$ and $set\_list$
 9:     else
10:         Select $i \in (N - set\_list)$
11:     end if
12: end while
13: if $set\_list \neq \emptyset$ then
14:     Remove last element from $worker\_list$ and $set\_list$
15:     goto 3
16: else
17:     Return $W_r$
18: end if
```

Alternatively, we propose Algorithm 2 to generate such sets. This algorithm enumerates all possible combinations of workers that may be assigned to a team. It starts with an empty list of sets of tasks. In each iteration, if there is a task that has not yet been executed, we select a set of tasks containing this task (line 3). Both the set and the worker that executes the set are added to their respective lists (lines 4 and 5). If all tasks are executed, the subproblem is complete and is added to the list of subproblems to be solved in the next phase (line 7). Observe that if there are workers remaining, any worker we add to the list will also result in a valid solution. If there are no remaining workers or if the remaining workers cannot execute the task, the method tries another subset of tasks of the last worker in the workers list. If all subsets of a worker were already tested, we remove this worker from the worker list and the method continues with another worker. This process continues until we generate all the possible combinations of workers (line 17).

Observe that Algorithm 2 generates sets of workers with minimum cardinality. In order to generate all feasible sets we can either suppress line 8 or add the remaining workers to each set in W_r. The last option is preferable to avoid redundant sets.

Example (continued): For the example of Figure 3, all possible obtained combinations of sets are:

Line	worker w_1	worker w_2	worker w_3
1	$T_{w_1}(1) = \{1, 3, 5\}$	$T_{w_2}(1) = \{1, 2, 4\}$	
2	$T_{w_1}(1) = \{1, 3, 5\}$	$T_{w_2}(2) = \{2, 4, 5\}$	
3	$T_{w_1}(2) = \{3, 4, 5\}$	$T_{w_2}(1) = \{1, 2, 4\}$	
4	$T_{w_1}(1) = \{1, 3, 5\}$		$T_{w_3}(1) = \{1, 2, 3, 4, 5\}$
5	$T_{w_1}(2) = \{3, 4, 5\}$		$T_{w_3}(1) = \{1, 2, 3, 4, 5\}$
6		$T_{w_2}(1) = \{1, 2, 4\}$	$T_{w_3}(1) = \{1, 2, 3, 4, 5\}$
7		$T_{w_2}(2) = \{2, 4, 5\}$	$T_{w_3}(1) = \{1, 2, 3, 4, 5\}$
8	$T_{w_1}(1) = \{1, 3, 5\}$	$T_{w_2}(1) = \{1, 2, 4\}$	$T_{w_3}(1) = \{1, 2, 3, 4, 5\}$
9	$T_{w_1}(1) = \{1, 3, 5\}$	$T_{w_2}(2) = \{2, 4, 5\}$	$T_{w_3}(1) = \{1, 2, 3, 4, 5\}$
10	$T_{w_1}(2) = \{3, 4, 5\}$	$T_{w_2}(1) = \{1, 2, 4\}$	$T_{w_3}(1) = \{1, 2, 3, 4, 5\}$
11	$T_{w_1}(2) = \{3, 4, 5\}$	$T_{w_2}(1) = \{2, 4, 5\}$	$T_{w_3}(1) = \{1, 2, 3, 4, 5\}$
12			$T_{w_3}(1) = \{1, 2, 3, 4, 5\}$

Each of these combinations result in at least one feasible ALWABP solution.

4.3 Sets evaluation

The two first phases of the method generate a series of subproblems. The next phase of the method will evaluate these subproblems in order to find partial solutions. Each subproblem consists of a serial ALWABP with workers $W_0 \subseteq W$ and the solution of a subproblem is a partial solution for the

PALWABP-2. In this phase, these subproblems are solved in order to obtain the productivity of each possible line. This can be done using the model proposed by Miralles et al. (2007) on each subset, which uses binary variables x_{swi} equals one if task i is assigned to worker w at workstation s and binary variables y_{sw} equals one if worker w is assigned to workstation s.

Alternatively, we use the fast constructive heuristic developed by Moreira et al. (2012). This heuristic calculates a lower bound for the cycle time and tries to generate a solution with this cycle time. If no feasible solution is found, the cycle time is increased by one unit and the procedure is repeated until either a feasible solution is found or an upper bound for the cycle time is reached. Task and worker assignments are decided sequentially based on heuristic priorities.

The cycle time search used by Moreira et al. (2012) is a simple sequential search starting with a known lower bound and increasing one unity in the cycle time at each iteration until a feasible solution is found. In order to further improve the speed of the method, at each iteration, we increase the cycle time by the smallest task time among all tasks and workers, that is, $\bar{c} = \bar{c} + \min_w t_{wi}$. This greatly improves the method speed with little effect on solution quality.

Example (continued): Optimal assignments and the associated cycle times for each of the 12 lines obtained after step 2 are listed in the table below. When using the constructive heuristic, suboptimal results may be found.

Line	CT	worker w_1	worker w_2	worker w_3
1	10	3,5	1,2,4	
2	9	1,3	2,4,5	
3	10	3,5	1,2,4	
4	9	1,3		2,4,5
5	10	3,5		1,2,4
6	9		1,2,4	3,5
7	10		2,4,5	1,3
8	8	3	1,2,4	5
9	7	1	2,4,5	3
10	7	5	1,2,4	3
11	8	3	4,5	1,2
12	18			1,2,3,4,5

4.4 Sets selection

After the third step, we have a set of partial solutions associated with subsets of workers. The last phase of the method combines these partial solutions to create a solution for the PALWABP-2. Let $W_R = \{W_1, W_2, \ldots W_{|W_R|}\}$ be all sets of feasible sets of workers. Also, let TR_r be the throughput rate associated with a line with workers W_r and q_{wr} be a parameter equals one if worker w belongs to set W_r. With the use of variables e_r equals one if set W_r is selected, the problem of partitioning the workers in a most productive lines scheme can be written as:

$$\text{Max} \sum_{r \in W_r} TR_r e_r \tag{28}$$

subject to

$$\sum_{r=1}^{|W_r|} q_{wr} e_r = 1, \qquad \forall w \in W. \tag{29}$$

In which constraints (29) simply indicates that each worker must belong to a single selected set.

Observe that, for any subset of workers W_1 associated with a partial solution, $W_1 \cup \{w\}$ is also associated with a partial solution. Therefore, if $\{W_1, W_2, ..., W_n\}$ is a feasible solution, then $\{W_1, \{W_2 \cup ... \cup W_n\}\}$ is also a feasible solution. Algorithm 3 uses this idea to enumerate the combinations of sets of workers. We use the notation $\cup W_i$ to indicate the union of all sets in W_i.

Algorithm 3 Sets selection

```
Require: $W_r$
solutions = $\emptyset$
for all $W_i \subset W_r$ do
    if $\cup W_i = W$ then
        if $W_1 \cap W_2 = \emptyset \ \forall W_1, W_2 \in W_i$ then
            solutions = solutions $\cup W_i$
        end if
    end if
end for
Return solutions
```

The algorithm analyzes all combinations of sets of workers and checks if each worker is present in exactly one assembly line. Each combination of sets that satisfies this condition is a solution for the PALWABP. The final phase of the method will select the solution with the lowest cycle time.

Example: The best serial lines obtained (using the three workers) are lines 9 and 10, with a cycle time of 7. Nevertheless, by using worker w_1 and w_2 in line 2 and using worker w_3 in line 12 (alone), a cycle time of $CT = \frac{1}{\frac{1}{9}+\frac{1}{18}} = 6$ is obtained in this toy example.

5 Computational results

In this section we present the results obtained using the mathematical model and the heuristic method described in sections 3 and 4, respectively. To test these strategies, we generated a set of instances for the ALWABP based on the instances provided by Otto et al. (2013) for the SALBP. These instances vary in graph structure (bottleneck, chain or mixed), 'trickiness', order of strength and times distribution; representing a much more robust SALBP benchmark than the classical benchmark of Hoffmann (1990), as demonstrated by the authors. For each instance, we generated four instances for the ALWABP, with different time factors (2 or 5) and infeasibility rates (10% or 20%). A time factor of n means that, for every task with execution time of t in the original instance, the execution time of each worker is a random integer between t and $n * t$. The number of workers in each instance is equal to the upper bound on the number of stations in the original instance. We used the sets of instances with 20 tasks and 0.2 order strength as our base for generating a total of 900 instances. With this we have a more complete benchmark than the one provided by Chaves et al. (2009), allowing a better analysis of methods and extensions of the ALWABP.

Both strategies were implemented and tested in a computer with a Intel Core 2 Duo T5450 processor, 1,66 GHz and 3 GB of RAM. The following sections detail the results obtained. These are compared with the best know solutions for the respective serial ALWABP.

5.1 Results for the mathematical model

The model presented in section 3 was implemented and used to solve the instances generated with 10% infeasibility rate and a time factor of 2, that is, 225 instances. The results were obtained using IBM ILOG Cplex 12.4 with a time limit of 1800 seconds.

The model proved to be very difficult to solve. After half an hour of execution, it could prove optimality for only 20 instances. It also managed to prove that there was no feasible solution using more than one assembly line for 73 instances. For the remaining instances it found feasible solutions but with large optimality gaps. It was unable to find solutions whose cycle time was lower than the best known cycle time for the respective serial ALWABP.

These results show that the model is inefficient in what concerns execution time and solution quality. Therefore, we did not perform tests with the remaining more difficult instances.

5.2 Results for the heuristics

Table 2 presents the results obtained by the heuristic presented in section 4 for the set of instances generated, using two parallel lines. The results are grouped by task times variation, percentage of incompatible tasks and type of precedence graph. Columns C% represent the average difference between the best solution found by our heuristic and the best known solution for the serial ALWABP. Columns T indicate the average execution time of the heuristic in seconds. Columns P% indicate the percentage of solutions using parallel lines found, that is, the percentage of instances solved by the method. Column Best C% represents the largest improvement over the best know solution for the serial ALWABP among the instances with similar characteristics.

Time factor	2							
Infeasibility rate	10%				20%			
	C%	T(s)	P%	Best C%	C%	T(s)	P%	Best C%
Bottleneck	-0,25%	34,81	58,11%	-15,37%	-2,02%	15,88	39,19%	-14,94%
Chain	1,93%	24,47	68,92%	-17,56%	0,23%	14,67	45,95%	-15,73%
Mixed	0,36%	35,32	64,86%	-15,10%	-1,08%	21,04	45,95%	-16,15%

Time factor	5							
Infeasibility rate	10%				20%			
	C%	T(s)	P%	Best C%	C%	T(s)	P%	Best C%
Bottleneck	8,67%	44,88	58,11%	-21,13%	5,95%	21,48	39,19%	-10,74%
Chain	10,09%	31,29	68,92%	-15,85%	8,64%	19,25	45,95%	-13,10%
Mixed	11,19%	47,72	64,86%	-10,67%	8,27%	29,36	45,95%	-9,96%

Table 2: Test results for the heuristic for the ALWABP with parallel lines

The heuristic method ran in low computational time and found better solutions on average, with respect to the linear model. Most of the execution time corresponds to the second phase of the method, that is, the evaluation of the sets of workers. Moreover, the method was able to identify infeasible instances in less than a second.

As it was expected, the more incompatibilities each worker has, the harder it is to find solutions with parallel lines. However, in many instances with low infeasibility rates, the method found solutions with lower cycle times than the respective solution for the serial ALWABP. Indeed, the heuristic found solutions with cycle time up to 21,13% lower than the cycle time for the best known solution for the serial ALWABP. Instances with bottleneck precedence graphs resulted in the lowest average difference between the solution found by the heuristic and the respective ALWABP best known solution.

Table 3 presents the results considering only improved solutions, that is, solutions with lower cycle time than the best known solution for the serial ALWABP. Column P+% shows the percentage of improved solutions. Column C+% presents the average improvement of the improved solutions. These results show that a large percentage of instances can be improved and that this improvement can be significative with respect to the solutions of the best known (often optimal) serial solutions. Average gains in productivity for these cases vary from 2,98% to 8,33%, depending on the precedence graph and worker characteristics. These results indicate that such configurations should be considered when planning such assembly lines.

Time factor	2			
Infeasibility rate	10%		20%	
	P+%	C+%	P+%	C+%
Bottleneck	29,73%	-6,39%	22,97%	-6,58%
Chain	21,62%	-7,11%	20,27%	-5,98%
Mixed	24,32%	-8,23%	22,97%	-8,33%

Time factor	5			
Infeasibility rate	10%		20%	
	P+%	C+%	P+%	C+%
Bottleneck	14,86%	-5,43%	10,81%	-3,65%
Chain	6,76%	-5,84%	8,11%	-7,22%
Mixed	10,81%	-2,98%	12,16%	-3,15%

Table 3: Test results for the heuristic for the ALWABP with parallel lines (improved solutions)

6 Conclusions

We have defined, modeled and solved a new assembly line balancing problem named Parallel Assembly Line Worker Assignment and Balancing Problem. This problem is motivated by the context found in sheltered work centers for the disabled where workers with very different characteristics are assigned to assembly lines. The proposed model and algorithms indicate that the use of parallel assembly lines in this context might improve productivity levels. These results encourage the study of other alternative layouts or the proposal of even more efficient algorithms for the planning of parallel assembly lines in such situations. From a practical point of view, we provide an additional powerful approach for coping with workers heterogeneity while ensuring productivity; what becomes crucial for many SWDs survival in the current economical context. Exploring the potential use of this approach to minimize the adverse effects of absenteeism is foreseen as another interesting research line.

Acknowledgement

This research was supported by CAPES-Brazil and MEC-Spain (coordinated project CAPES DGU 258-12 / PHB2011-0012-PC) and by FAPESP-Brazil. The authors thank Dr. Marcus Ritt, from Universidade Federal do Rio Grande do Sul (UFRGS - Brazil), for providing the optimal solutions for the serial ALWABP

References

Araújo, F. F. B., Costa, A. M. and Miralles, C. (2012). Two extensions for the assembly line worker assignment and balancing problem: parallel stations and collaborative approach, *International Journal of Production Economics* **140**: 483–495.

Askin, R. G. and Zhou, M. (1997). A parallel station heuristic for the mixed-model production line balancing problem, *International Journal of Production Research* **35**: 3095–3106.

Becker, C. and Scholl, A. (2006). A survey on problems and methods in generalized assembly line balancing, *European Journal of Operational Research* **168**: 694–715.

Blum, C. and Miralles, C. (2011). On solving the assembly line worker assignment and balancing problem via beam search, *Computers & Operations Research* **38**: 328–339.

Borba, L. D. M. and Ritt, M. (2012). A task-oriented branch-and-bound method for the assembly line worker assignment and balancing problem, *Anais do XLIV Simpósio Brasileiro de Pesquisa Operacional*, Rio de Janeiro, pp. 1–10.

Boysen, N. and Fliedner, M. (2008). A versatile algorithm for assembly line balancing, *European Journal of Operational Research* **184**: 39–56.

Boysen, N., Fliedner, M. and Scholl, A. (2007). A classification of assembly line balancing problems, *European Journal of Operational Research* **183**: 674–693.

Boysen, N., Fliedner, M. and Scholl, A. (2008). Assembly line balancing: Which model to use when?, *International Journal of Production Economics* **111**: 509–528.

Bukchin, J. and Rubinovitz, J. (2003). A weighted approach for assembly line design with station paralleling and equipment selection, *IIE Transactions* **35**: 73–85.

Chaves, A., Lorena, L. and Miralles, C. (2009). Hybrid Metaheuristic for the Assembly Line Worker Assignment and Balancing Problem, *in* M. Blesa, C. Blum, L. Gaspero, A. Roli, M. Sampels and A. Schaerf (eds), *Hybrid Metaheuristics*, Vol. 5818 of *Lecture Notes in Computer Science*, Springer Berlin Heidelberg, pp. 1–14.

Costa, A. M. and Miralles, C. (2009). Job rotation in assembly lines employing disabled workers, *International Journal of Production Economics* **120**: 625–632.

Dolgui, A. and Battaïa, O. (2013). A taxonomy of line balancing problems and their solution approaches, *International Journal of Production Economics* **142**: 259–277.

Ege, Y., Azizoglu, M. and Ozdemirel, N. E. (2009). Assembly line balancing with station paralleling, *Computers & Industrial Engineering* **57**: 1218–1225.

Gökçen, H., Ağpak, K. and Benzer, R. (2006). Balancing of parallel assembly lines, *International Journal of Production Economics* **103**: 600–609.

Greve, B. (2009). The labour market situation of disabled people in European countries and implementation of employment policies: a summary of evidence from country reports and research studies, *Academic Network of European Disability Experts (ANED)* .

Hoffmann, T. R. (1990). Assembly line balancing: a set of challenging problems, *International Journal of Production Research* **28**: 1807–1815.

Kara, Y., Gökçen, H. and Atasagun, Y. (2010). Balancing parallel assembly lines with precise and fuzzy goals, *International Journal of Production Research* **48**: 1685–1703.

Kellegöz, T. and Toklu, B. (2012). An efficient branch and bound algorithm for assembly line balancing problems with parallel multi-manned workstations, *Computers & Operations Research* **39**: 3344–3360.

McMullen, P. R. and Frazier, G. (1998). Using simulated annealing to solve a multiobjective assembly line balancing problem with parallel workstations, *International Journal of Production Research* **36**: 2717–2741.

McMullen, P. R. and Frazier, G. V. (1997). A heuristic for solving mixed-model line balancing problems with stochastic task durations and parallel stations, *International Journal of Production Economics* **51**: 177–190.

Miralles, C., Garcia-Sabater, J. P., Andres, C. and Cardos, M. (2007). Advantages of assembly lines in Sheltered Work Centres for Disabled. A case study, *International Journal of Production Economics* **110**: 187–197.

Miralles, C., Garcia-Sabater, J. P., Andres, C. and Cardos, M. (2008). Branch and bound procedures for solving the Assembly Line Worker Assignment and Balancing Problem: Application to Sheltered Work centres for Disabled, *Discrete Applied Mathematics* **156**: 352–367.

Miralles, C., Marin-Garcia, J. A., Ferrus, G. and Costa, A. M. (2010). Operations research/management science tools for integrating people with disabilities into employment. A study on Valencia's Sheltered Work Centres for Disabled, *International Transactions in Operational Research* **17**: 457–473.

Moreira, M. C. O. and Costa, A. M. (2009). A minimalist yet efficient tabu search for balancing assembly lines with disabled workers, *Anais do XLI Simpósio Brasileiro de Pesquisa Operacional*, Porto Seguro, Brazil, pp. 660–671.

Moreira, M. C. O. and Costa, A. M. (2012). Hybrid Heuristics for planning job rotation in Assembly Lines with disabled workers, *International Journal of Production Economics* **141**: 552–560.

Moreira, M. C. O., Ritt, M., Costa, A. M. and Chaves, A. A. (2012). Simple heuristics for the assembly line worker assignment and balancing problem, *Journal of Heuristics* **18**: 505–524.

Mutlu, O., Polat, O. and Supciller, A. A. (2013). An iterative genetic algorithm for the assembly line worker assignment and balancing problem of type-II, *Computers & Operations Research* **40**: 418–426.

Otto, A., Otto, C. and Scholl, A. (2013). Systematic data generation and test design for solution algorithms on the example of SALBPGen for assembly line balancing, *European Journal of Operational Research* .
URL: *http://dx.doi.org/10.1016/j.ejor.2012.12.029*

Ozbakir, L., Baykasoglu, A., Gorkemli, B. and Gorkemli, L. (2011). Multiple-colony ant algorithm for parallel assembly line balancing problem, *Applied Soft Computing* **11**: 3186–3198.

Scholl, A. and Becker, C. (2006). State-of-the-art exact and heuristic solution procedures for simple assembly line balancing, *European Journal of Operational Research* **168**: 666–693.

Scholl, A. and Boysen, N. (2009). Designing parallel assembly lines with split workplaces: Model and optimization procedure, *International Journal of Production Economics* **119**: 90–100.

Simaria, A. S. and Vilarinho, P. M. (2004). A genetic algorithm based approach to the mixed-model assembly line balancing problem of type II, *Computers & Industrial Engineering* **47**: 391–407.

Süer, G. A. (1998). Designing parallel assembly lines, *Computers & Industrial Engineering* **35**: 467–470.

Vilarinho, P. M. and Simaria, A. S. (2002). A two-stage heuristic method for balancing mixed-model assembly lines with parallel workstations, *International Journal of Production Research* **40**: 1405–1420.

Vilarinho, P. M. and Simaria, A. S. (2006). ANTBAL: an ant colony optimization algorithm for balancing mixed-model assembly lines with parallel workstations, *International Journal of Production Research* **44**: 291–303.